

[60 GHz Wireless](#)

[Wireless](#)

[Fiber](#)

[Wired](#)


[Accessory Tech](#)

[Wired](#) > [UISP Switch Plus](#)

[Datasheet](#)

[Installation Guide](#)

[Marketing Images](#)

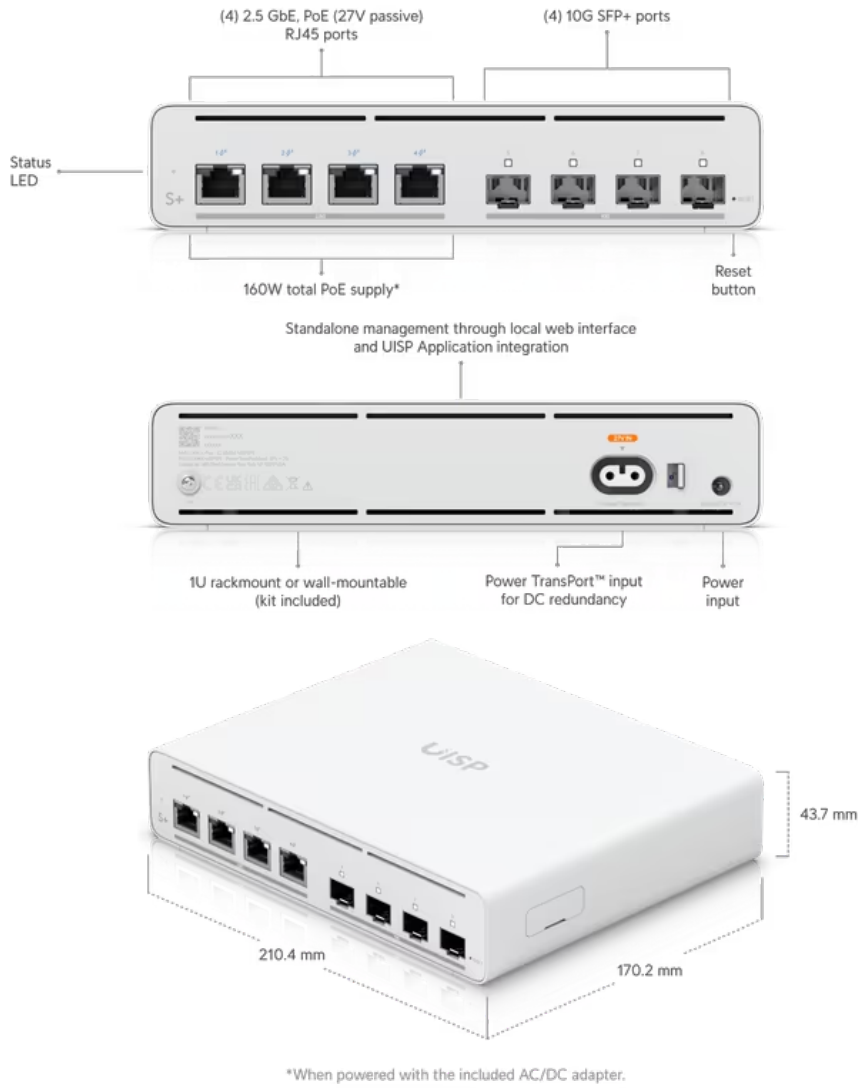

## Mechanical

<b>Dimensions</b>	210.4 x 170.2 x 43.7 mm (8.3 x 6.7 x 1.7")
<b>Weight</b>	1.75 kg (3.9 lb)
<b>Enclosure materials</b>	SGCC steel, polycarbonate/acrylonitrile butadiene styrene

## Hardware

<b>Processor</b>	Dual-core ARM®v8 Cortex®-A55 at 1.4 GHz
<b>Memory</b>	1 GB DDR4
<b>Onboard flash storage</b>	256 MB NAND
<b>Networking interface</b>	(4) 1/2.5 GbE RJ45 LAN ports (4) 1/10G SFP+ ports

<b>Management interface</b>	Ethernet In-band Bluetooth
<b>Total non-blocking throughput</b>	50 Gbps
<b>Switching capacity</b>	100 Gbps
<b>Forwarding rate</b>	74.4 Mpps
<b>Power method</b>	(1) External AC/DC adapter (1) Power TransPort DC input 27V DC, 7.04A
<b>Power supply</b>	27V DC, 7.04A power adapter (included)
<b>Supported voltage range</b>	24-28V DC
<b>Max. power consumption</b>	25W (Excluding PoE output.)
<b>ESD/EMP protection</b>	Air: $\pm 15$ kV, contact: $\pm 8$ kV
<b>Operating temperature</b>	-10 to 50° C (14 to 122° F)
<b>Operating humidity</b>	5 to 95% noncondensing
<b>Certifications</b>	CE, FCC, IC

---

## PoE

<b>PoE interface</b>	(4) 27V passive PoE: 2-pair (pins 4, 5+/7, 8-) or 4-pair (pins 1, 2, 4, 5+/3, 6, 7, 8-); Ports 1 to 4
<b>Total available PoE</b>	160W (With included power adapter.)
<b>Max. passive PoE wattage per port</b>	2-pair mode: 20W/27V DC 4-pair mode: 40W/27V DC
<b>Passive PoE voltage range</b>	27V DC

---

## LEDs

<b>System</b>	Status
<b>RJ45 data ports</b>	PoE Speed/link/activity
<b>SFP+ data ports</b>	Link/activity

---

## Software

Management application

UISP

[Compliance Information](#)

### Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.