



i64 SIP Door Phone

Description

The i64 is a cutting-edge SIP door phone that combines access control, intercom, and security functionalities into one sophisticated unit. It boasts a sleek, technologically advanced design and is constructed using premium intelligent manufacturing techniques. The device features a full keyboard, enhancing its usability across diverse scenarios. It meets the rigorous IP66 and IK07 protection standards and offers high security, making it ideal for outdoor settings. The i64 supports various door opening methods for streamlined access management and is equipped with a 2-megapixel camera that enables one-touch audio and video communication. Compatible with SIP and ONVIF protocols, it integrates seamlessly with security systems and works well with major mainstream platforms. Customizable for different scenarios, the i64 is perfect for upscale residential complexes, office buildings, communities, and industrial parks.

Main Features



Brand new digital keypad design with color backlight for an enhanced user experience



Equipped with a 2 mega pixel HDR high-definition camera, it provides clearer imaging



IP66 & IK07 high protection rating, wide temperature operation, suitable for harsh outdoor environments




Equipped with a wide range of interfaces for connecting various security devices



Supports the standard ONVIF protocol, providing high flexibility and excellent compatibility



Community

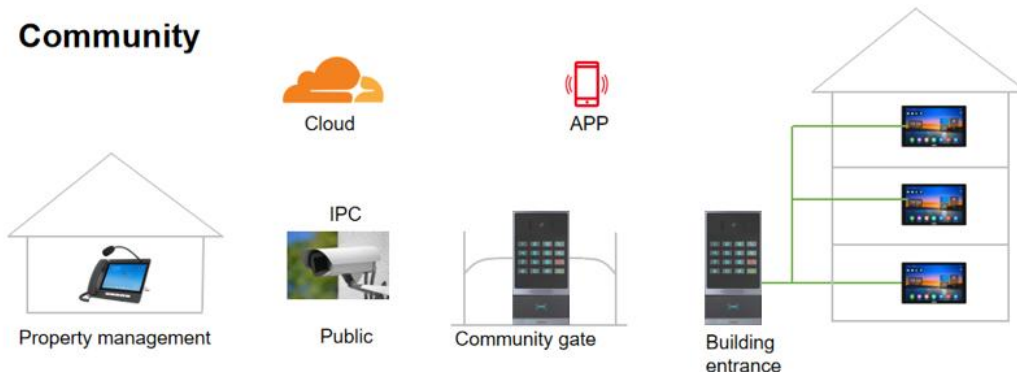

Fanvil Technology Co., LTD

Add: 10F, Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao'An District, Shenzhen, China

Phone: 0755-26402199 E-mail: sales@fanvil.com Web: www.fanvil.com

Specifications

Panel Type	Multi-apartment, Community, Hotel
Screen/Keyboard	12 Numeric keys+4 Function keys, Color backlight
Body	Aluminum
Colors	Gunmetal
Sensor	1/2.9-inch, COMS
Camera	2 Mpx,Support infrared
Viewing Angle	120°(Horizontal) 60°(Vertical)
Output Video	H.264 (Baseline,Main Profile)
Light Sensitivity	0.1Lux
Card Storage	10,000
Face Storage	10,000
Power Consumption	PoE: 1.71~6.96W Adapter: 1.52~6.26W
Power Supply	DC 12V / 1A POE 802.3af Class 3
Working Temperature	-40°C~+70°C
Storage Temperature	-40°C~+70°C
Size of the Panel (LWH)	177.4x88x36.15mm
IP / IK Level	IP66 / IK07
Installation	Wall-mounted Flush-mounted(Need to purchase accessories separately: EX102)

Functional Capabilities

Supported Protocols	SIP 2.0 over UDP/TCP/TLS
Lock Opening	IC/ID Card, By DTMF Code, PIN Code, Remote door opening
Interface	Wiegand Input/Output Short Circuit Input/Output RS485 (Reserve) Line out for induction loop
Supported Wiegand	26, 34 bit
Supported ONVIF Types	Profile S
Supported Standards	Mifare Classic 1K/4K, Mifare DESFire, Mifare Ultralight, Mifare Plus Cards 13.56 MHz, Cards 125 kHz
Talking Mode	Full duplex (High-definition Audio)
Additionally	Built-in relay, Open API, Motion detection, Tamper alarm, TF Card