


[WiFi](#)
[Switching](#)
[Cloud Keys & Gateways](#)
[Camera Security](#)
[Door Access](#)
[Phone System](#)
[New](#)

Switching > [Pro Max 24](#)

[Datasheet](#)

Installation Guide

Marketing Images

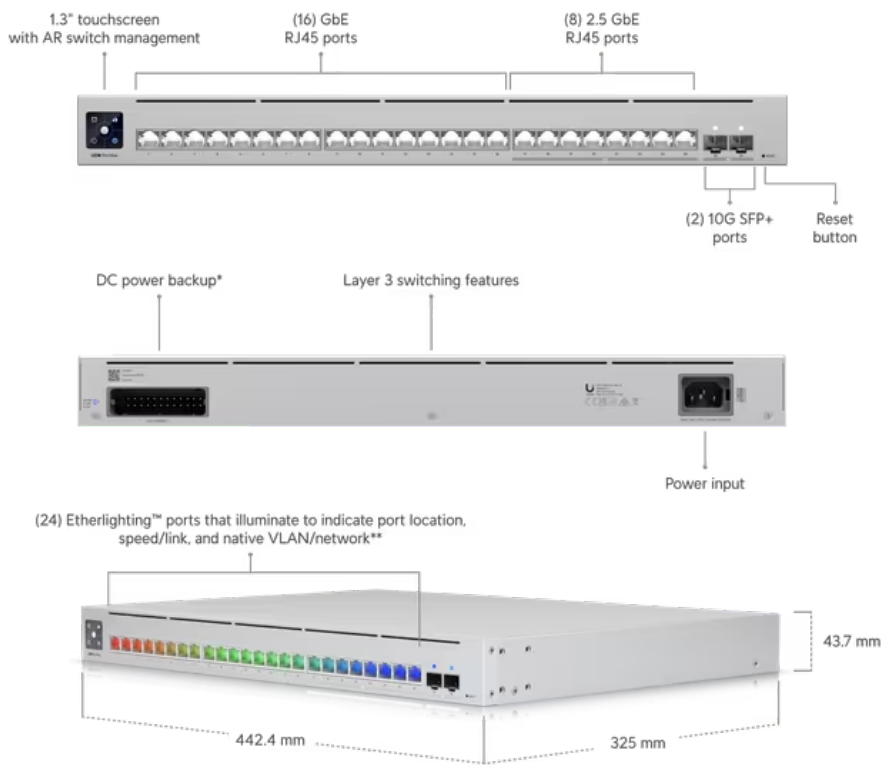

*Require UniFi Power Backup.
 **Pair with UniFi Etherlighting Patch Cables for optimal brightness.

Mechanical

Dimensions

442.4 x 325 x 43.7 mm (17.4 x 12.8 x 1.7")

Weight	Without mounting brackets: 4.2 kg (9.3 lb) With mounting brackets: 4.3 kg (9.5 lb)
Enclosure material	SGCC steel

Hardware

Management interface	Ethernet In-Band
Networking interface	(16) GbE RJ45 ports (8) 1/2.5 GbE RJ45 ports (2) 10G SFP+ ports
Total non-blocking throughput	56 Gbps
Switching capacity	112 Gbps
Power method	Universal input, 100—240V AC, 50/60 Hz USP RPS DC input
Power supply	AC/DC, internal, 50W
Supported voltage range	100—240V AC
Max. power consumption	50W
LCM display	(1) 1.3" touchscreen
Button	Factory reset
Operating temperature	-5 to 40° C (23 to 104° F)
Operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

Etherlighting™

Ethernet	Locating Speed/link Native VLAN/network
SFP+	Locating Speed/link Native VLAN/network

LEDs


System Status

RPS Status

Application Requirements

UniFi Network Version 8.0.24 and later

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.