



F-Series ID

FLIR F-SERIES ID

Thermal Security Camera with onboard analytics

The F-Series ID is FLIR's premium line of perimeter protection thermal security cameras. F-Series ID cameras define the new standard of perimeter protection for critical infrastructure. Five models provide full 640 × 480 thermal resolution, longer detection ranges, and better analytics performance than ever before. The F-Series ID features best-in-class thermal image detail and high-performance onboard analytics in a single device that is easy to set-up. Capable of classifying human or vehicular intrusions, the F-Series ID delivers optimal intrusion detection in challenging environments and extreme conditions with fewer false alarms.

RELIABLE ONBOARD ANALYTICS

The F-Series ID accurately classifies humans and vehicles

- Auto calibration results in a simple and reliable configuration, requiring only a single installer on site with no additional measurement tools
- Capable of specifying up-to four areas, four tripwires, and multiple masking regions in parallel
- Target hand-off to PTZ camera auto-tracking

CRISP THERMAL IMAGES WITH WIDE FIELDS OF VIEW



Detailed thermal images improve threat detection and alarm assessment at greater distances

- Superior image quality in low-contrast conditions
- FLIR's custom AGCs produce extremely high contrast
- Digital Detail Enhancement (DDE) creates sharp edges that improve performance of analytics

PLUG-AND-PLAY

Integrates with major 3rd party VMS platforms and technologies

- Exchangeable camera cassettes allow for quick upgrade or repair of sensors and optics
- Open IP standards for plug-and-play integration; ONVIF compliant
- H.264 and M-JPEG streaming

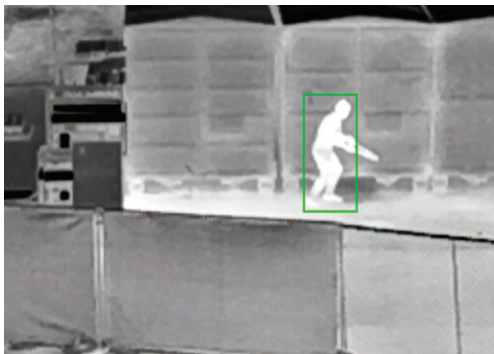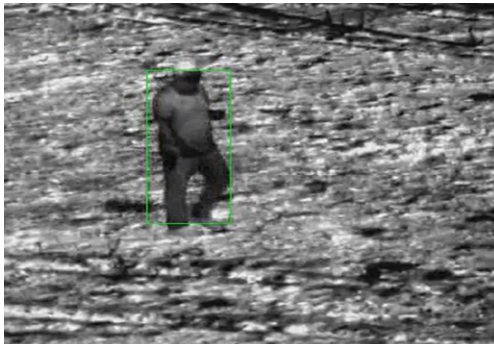

Specifications

Model		F-6XX ID	
Array Format	640 x 480		
Detector Type	Long-Life, Uncooled VOx Microbolometer		
Spectral Range	7.5 μm to 13.5 μm		
Effective Resolution	307,200		
Pixel Pitch	17 μm		
Thermal Frame Rate	NTSC: 30 Hz PAL: 25 Hz / 8.3 Hz		
Optical Characteristics	Model	FOV	F#, Focal Length
	F-644 ID	44°x36°	13 mm, f/1.0
	F-625 ID	25°x18°	25 mm, f/1.1
	F-617 ID	17°x14°	35 mm, f/1.1
	F-612 ID	12°x10°	50 mm, f/1.2
	F-608 ID	8.6°x6.6°	75 mm, f/1.1
E-Zoom	4x continuous E-Zoom		
Focus	Athermalized, Focus-Free		
Sensitivity	<35 mK @ 25°C F# 1.0		
Video			
Composite Video NTSC or PAL	Yes: IP & Analog		
Analog Video Output Composite	1Vp-p (PAL or NTSC), 1 x BNC 75Ω		
Video Compression	Two independent channels of H.264 & M-JPEG		
Streaming Resolution	QVGA to VGA		
Thermal AGC Modes/Features	Auto AGC / Digital Detail Enhancement (DDE) / Sensitivity / Brightness / Contrast / Sharpness		
Thermal AGC Region of Interest (ROI)	Default, Presets and User definable to insure optimal image quality on subjects of interest		
Analytics Management	Web-based configuration and management		
Analytics Features	Region Entrance/Intrusion Detection, Crossover/Fence Trespassing; Auto/Manual Depth Setup, Human and Vehicle Rules, Hand-off target to PTZ tracking, Tampering		
Image Uniformity Optimization	Automatic Flat Field Correction (FFC) - Thermal and Temporal Triggers		
System Integration			
Ethernet	10/100 Mbps		
Control Input/Output	1x Dry Contact in; 1x Relay Out (rated load 0.09A@ 5VDC)		
Network APIs	FLIR SDK, FLIR CGI, ONVIF Profile S		
Network			
Supported Protocols	IPv4, HTTP, UPnP, DNS, NTP, RTSP, RTCP, RTP, TCP, UDP, ICMP, IGMP, DHCP, ARP		
Physical			
Weight	9.55lb (4.4kg)		
Dimensions (L, W, H)	18.1" x 5.5" x 6.3" (460 x 140 x 160 mm)		
Electrical			
Input Voltage	24 VDC (21-30 VDC), 24 VAC (21-30 VAC)		
Power Consumption	24 VAC: 15 VA (max w/o heaters), 51 VA (max w/heaters) 24 VDC: 10 W (max w/o heaters), 46 W (max w/heaters)		

Environmental	
IP Rating (Dust & Water Ingress)	IP66
Operating Temperature Range	-40°C to 70°C / -40° F to 158°F cold start
Storage Temperature Range	-55° to 85°C / -67° F to 185° F
Humidity	0-95% relative
Shock	MIL-STD-810F "Transportation"
Vibe	IEC 60068-2-27
De-Icing / Anti-Icing	MIL-STD-810F, Method 521.1; - De-Icing of 3/6mm model dependent
Warranty & Regulatory	
Compliance & Certifications	FCC Part 15 (Subpart B, class A) CE Marked RoHS IP66 ONVIF Profile S WEEE
Warranty	Camera: 3 Years Sensor: 10 Years

CORPORATE HEADQUARTERS
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
PH: +1 866.344.4674

FLIR Systems, Inc.
6769 Hollister Ave,
Goleta, CA 93117
USA
PH: +1 866.344.4674

www.flir.com
NASDAQ: FLIR

EUROPE
FLIR Systems
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5100

CANADA
FLIR Systems - Canada
250 Royal Crest Court
Markham, Ontario,
Canada L3R 3S1
PH: +1 866.344.4674

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2018 FLIR Systems, Inc. All rights reserved. 4/03/18 18-0641-SEC-PRO-Thermal-F-Series ID Datasheet