

UniFi UISP Branding

Q

UDB-Pro-Sector

Switching WiFi Camera Security Door Access Integrations Advanced Hosting



Bridging > [Device Bridge Pro Sector](#)

Datasheet

In The Box

Marketing Images

Installation Guide

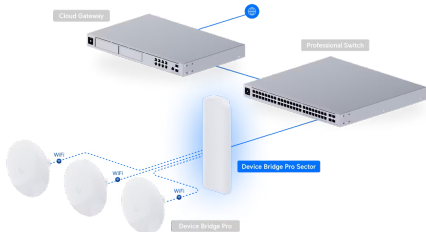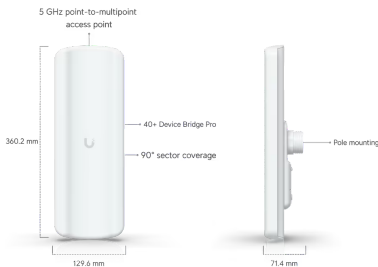

Overview

Dimensions	360.9 x 129.6 x 71.4 mm (14.2 x 5.1 x 2.8")
WiFi Standard	WiFi 5
Spatial Streams	2
Coverage Area	5 km (3.1 mi)
Mounting Locations	Pole
Weatherproofing	IPX6
Power Method	PoE

Performance

MIMO	
5 GHz	2 x 2
Max. Data Rate	
5 GHz	400 Mbps (BW40)

Antenna Gain

5 GHz

17 dBi

Max. TX Power

5 GHz

25 dBm

Max. Conducted TX Power

25 dBm (Combined)

Supported Data Rates

802.11a

6, 9, 12, 18, 24, 36, 48, 54 Mbps

802.11n

6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)

802.11ac (WiFi 5)

6.5 Mbps to 400 Mbps (MCS0 - MCS9 NSS1/2, VHT 20/40)

Wireless Security

WPA2 AES (Always On)

^ **Hardware**

Max. Power Consumption

6W

Supported Voltage Range

42.5—57V DC

Networking Interface

(1) GbE RJ45 port

Antennas

Internal

Management

Ethernet
WiFi

Wind Loading

128.2N at 200 km/h

Weight

Device: 782 g (1.7 lb)
With mount: 835 g (1.8 lb)

Mount Material

UV-stabilized polycarbonate, stainless steel

Enclosure Material

UV-stabilized polycarbonate

Pole Mount Diameter

0.9—2.4" (24—60 mm)

Button

(1) Factory-reset

LEDs

System

Power, Ethernet

Channel Bandwidth

20/40 MHz

Certifications

CE, FCC, IC

US/CA:

U-NII-1 5150 - 5250 MHz

U-NII-2A 5250 - 5350 MHz

Operating Frequency

U-NII-2C 5470 - 5725 MHz
U-NII-3 5725 - 5850 MHz

Worldwide:
5150 - 5875 MHz

Ambient Operating Temperature

-40 to 60° C (-40 to 140° F)

Ambient Operating Humidity

5 to 95% noncondensing

NDAA Compliant

✓

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.