



PoE Power Injector

The Power Injector eliminates the need for a PoE enabled hub. In a typical installation, the Power Injector is connected between a non-PoE hub and a CyberData paging device, providing inline power capability to an Ethernet Cat 5 cable.



Specifications

Input voltage 90 VAC to 264 VAC
Input frequency 47 Hz to 63 Hz
Inrush current less than 60A at 230VAC
cold start, 25°
Output voltage..... +48 VDC
Output current 0.35 A
Meet green mode < 0.5W (at no load)
Efficiency 75%~85% depends on models
Holdup time..... 16ms typical
at rated load and 115VAC
Over voltage protection latch off
Short circuit protection..... auto recovery


Over current protection auto recovery
Operating temperature -20°C to 60
above 40°C, derate at 2.5% per degree
Cooling free air convection
Storage temperature -20°C to +85
EMI FCC class "B"
CISPR22 level "B"
EMS EN61000-4-2, -3, -4, -5, -6, -11
Safety UL 60950-1, LPS
CSA C22.2 No. 60950-1
TUV EN60950-1

PoE Power Injector

Part Number 010867



PoE Power Injector

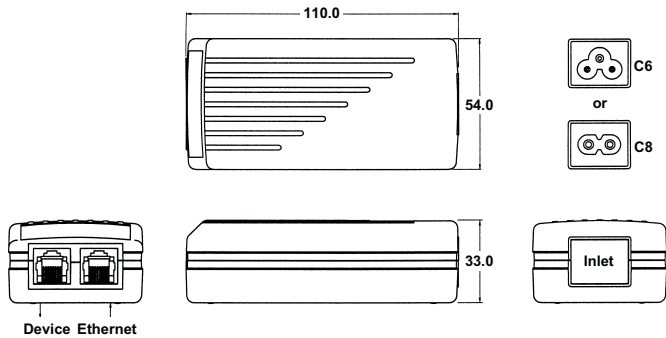

Notes:

1. Dimensions shown in mm as left. Tolerance: ± 1 mm (Excluding cables).
2. Size:
54.0 X 110.0 X 33.0 (mm)
3. Packing:
Net weight: 140 g approx. / unit
Gross weight: 19 kg approx. / carton, 120 units / carton
Carton size (mm): 535 (L) x 489 (W) x 314 (H)
4. Connectors:
AC input :
IEC 320 C8: SNP-POEX
C6: SNP-POEX-3 (* X: 7/9/T)
Device connector : RJ45
Ethernet connector : RJ45
5. Box Color : Black