


[WiFi](#) [Switching](#) [Cloud Keys & Gateways](#) [Camera Security](#) [Door Access](#) [Phone System](#) [New](#)

[Cloud Keys & Gateways](#) / Gateway Lite

[Datasheet](#)

[Installation Guide](#)

[Marketing Images](#)

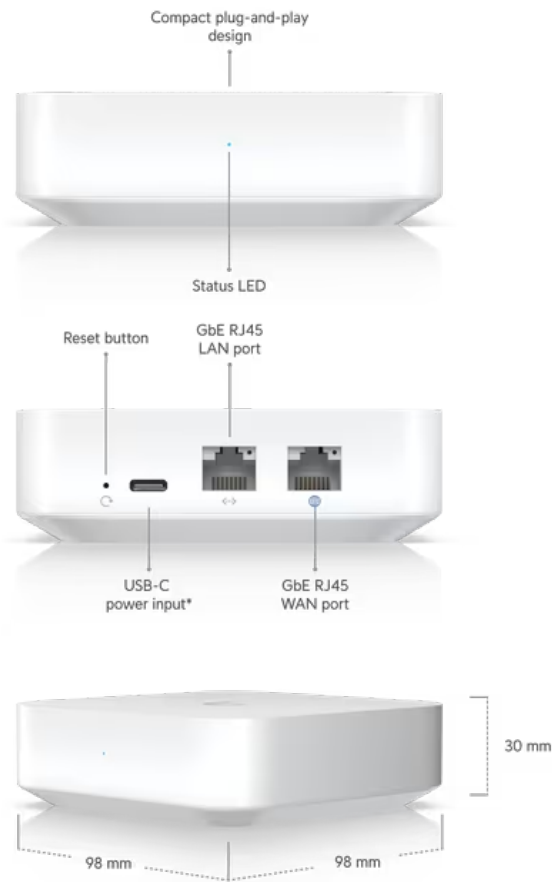

*5V DC, 3A USB-C adapter included.

Mechanical

Dimensions	98 x 98 x 30 mm (3.9 x 3.9 x 1.2")
Weight	320 g (11.3 oz)
Enclosure materials	Polycarbonate

Hardware

Processor	Dual-core ARM® Cortex®-A53 at 1 GHz
Memory information	1 GB DDR3L
Management interface	Ethernet Bluetooth 5.1
Networking interface	(1) GbE RJ45 WAN port (1) GbE RJ45 LAN port
Power method	USB type C (5V/3A)
Supported voltage range	100-240V
Max. power consumption	3.83W
Operating temperature	-10 to 40° C (14 to 104° F)
Operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

Gateway Features

Performance	WiFi QoS with UniFi APs Application, domain, and country-based QoS Application and device type identification Additional internet failover with LTE Backup Internet quality and outage reporting
Next-generation security	Application-aware firewall rules Signature-based IPS/IDS threat detection Content, country, domain, and ad filtering VLAN/subnet-based traffic segmentation Full stateful firewall
Advanced networking	License-free SD-WAN* WireGuard, L2TP and OpenVPN server OpenVPN client

- OpenVPN and IPsec site-to-site VPN
- One-click Teleport* and Identity Enterprise VPN**
- Policy-based WAN and VPN routing
- DHCP relay
- Customizable DHCP server
- IGMP proxy
- IPv6 ISP support

*When paired with a Cloud Key or Official UniFi Hosting.

**When paired with a Cloud Key.

Application Requirements

UniFi Network Version 8.0.7 and later

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.