

UniFi   UISP   Branding

Q Search UniFi products

Switching   WiFi   Camera Security   Door Access   Integrations   Advanced Hosting



Bullet > [G6 Bullet](#)

Datasheet

In The Box

Marketing Images

Installation Guide

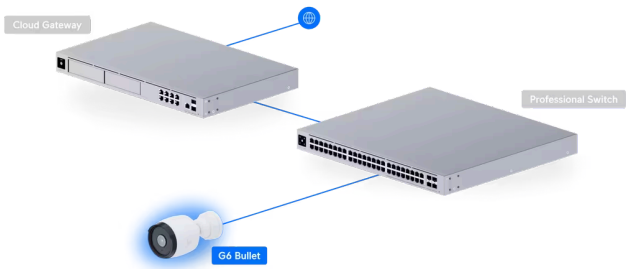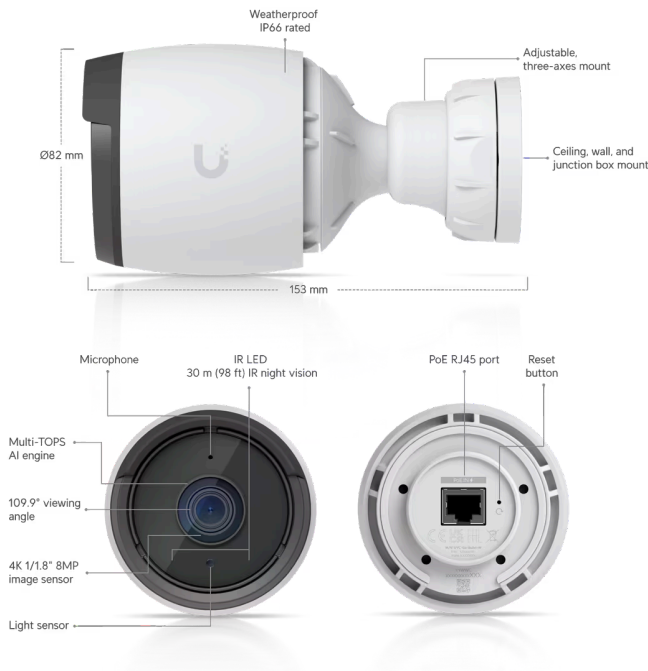

Overview

Without mount: Ø82 x 88.8 mm  
(Ø3.2 x 3.5")

Dimensions

With mount: Ø82 x 153 mm

By clicking "Accept All Cookies", you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

[Cookies Settings](#)

Accept All Cookies

Resolution	4K
Field of View	H: 109.9°, V: 56.7°, D: 134.1°
Audio	Microphone
Weatherproofing	IP66
Tamper Resistance	IK04
Mounting	Wall, ceiling, pole mount (Included) Junction box, angled base (Optional)

^ Performance

Networking Interface	10/100 MbE RJ45 port
Video	
Image Settings	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay, HDR
Max. Frame Rate	30 FPS
Resolution	8MP 3840 x 2160 (16:9)
Optics	
Sensor	1/1.8" 8MP
Lens	Fixed focal length
Night Mode	Built-in IR LED illumination and IR cut filter

^ Hardware

Max. Power Consumption	9.9W
Supported Voltage Range	37-57V DC
Power Method	PoE
Processor	Quad-core Arm® Cortex®-A53 based chip
Pole Mount Diameter	1.5-2" (38-50 mm)

(1.3 lb)  
5 lb)  
um alloy  
alloy, polycarbonate  
alloy

By clicking "Accept All Cookies", you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

Ambient Operating Temperature	-20 to 50° C (-4 to 122° F)
Ambient Operating Humidity	0 to 90% noncondensing
Certifications	CE, FCC, IC
NDAA Compliant	✓

Stay in Touch

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.