


MAXHUB RAPTOR SERIES V3 LITE

Make your meeting room a masterpiece with an ultra-thin all-in-one LED.

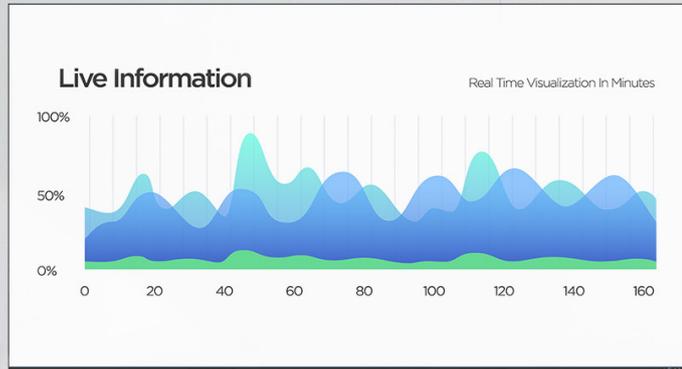


ULTRA-SLIM. ULTRA-LIGHT. ULTRA IMMERSIVE.

With an ultra-narrow bezel and ultra-thin, lightweight design, Raptor Series V3 Lite creates wall-to-wall immersion. It disappears into the room, letting the visuals connect without distraction.

Magnalium Cabinet


Die-Casting

135" Display Area(COB)	135"/162" Display Area(SMD)
105kg per Display(COB)	100kg/144kg per Display(SMD)

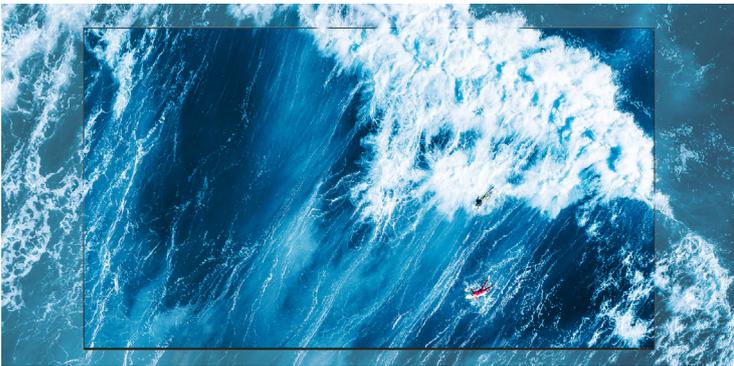

98.3% Display Area

6mm

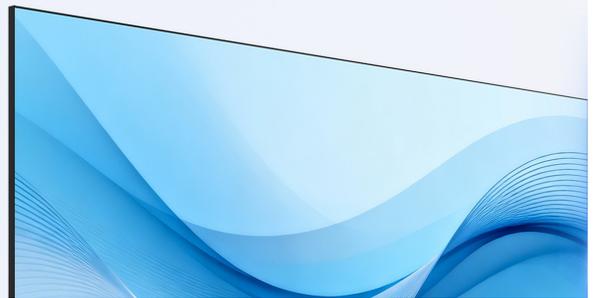

6mm Ultra-Narrow Bezel



Others

Raptor Series V3 Lite

105%
Wide Color Gamut

15000: 1
Contrast Ratio

(Remarks: COB Version Parameters)

True-to-Life Visuals



IR

USB

Type-C

Standby/Wake up Button

True-to-Life Visuals

**ALL-IN-ONE.
PLUG-AND-PLAY.**

The ultra-thin, all-in-one design eliminates racks, power cabinets, and external processors—cutting the clutter. Plug in and go for instant performance and a cleaner, more refined meeting space.



13 Android 13.0

GPU
4-Core

CPU
18-CORE

NPU
6TOPS

HIGH-PERFORMANCE EXPERIENCE

An octa-core CPU (4×A76 + 4×A55) paired with a 4-core GPU and a 6 TOPS NPU delivers zero-lag speed—even on complex, AI-driven tasks. With 8GB RAM, 64GB storage, and Android 13, you get instant response, smooth multitasking, and a future-ready platform.

CONNECT FASTER. COLLABORATE SMARTER.

Dual-band Wi-Fi 6 (2.4/5 GHz) delivers low-latency casting and rock-solid connections, while Bluetooth 5.3 enables instant, multi-device pairing. With one-touch device sync, everyone joins in seconds—share, co-create, and keep the flow without delays.

WiFi 6
Low Latency

Bluetooth 5.3
Instant Pairing



**ONE SERIES.
THREE WAYS TO WOW.**

Choose 135" COB, 135" SMD, or 162" SMD. The all-in-one Raptor Series V3 Lite fits any meeting space with a seamless install and a minimalist design that puts your content front and center.

135"



COB

135"/162"



SMD

FAST SETUP. EASY MAINTENANCE.

A clean, streamlined design speeds deployment and simplifies service, so you spend less time setting up and more time getting work done.




FAST SETUP. WALL-READY.

Wall-mount ready and ultra-thin at 31mm, it installs with no steel structure and zero structural impact. Column delivery, one power cord, and no external devices for rapid deployment.

EASY MAINTENANCE

Hot swappable modules and full front access keep maintenance quick and downtime near zero. No rear clearance required. Mount it tight to the wall for a cleaner, space saving install.

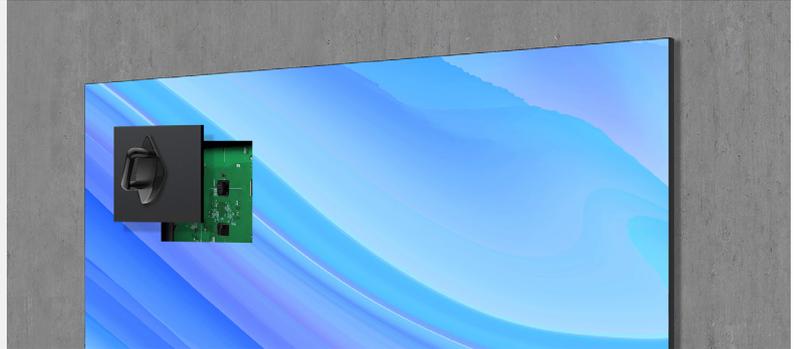

ALL IN ONE CONTROLLER. TOTAL CONNECTIVITY.

Enjoy triple screen display with seamless switching and lossless passthrough. Professional compatibility keeps your setup clean, reliable, and ready for every meeting.

DESIGNED TO IMPRESS. EFFORTLESS TO USE.

From training rooms and large conference spaces to corporate reception, it's simple to deploy and intuitive to operate. A refined, minimalist design blends in beautifully and elevates every environment.



Conference Room



Training Rooms



Corporate Reception



REMOTE DEVICE MANAGEMENT

One-stop platform to manage devices and spaces with ease, significantly improve efficiency, and minimize device downtime.

- Remote upgrades
- Remote screen control
- Content management platform to publish messages
- App install and multi-Level device group

PRODUCT SPECIFICATIONS



Raptor Series V3 Lite (SMD)



Raptor Series V3 Lite (COB)

Product Parameters

Display Size	135" / 162"	135"
LED Pixel Pitch	P1.5 / P1.9	
Display Resolution	1920*1080	
Built-in System	Andriod 13	
Display Size	<input type="checkbox"/>	<input checked="" type="checkbox"/> 2x15W
I/O Connectivity		
Exterior	USB 3.0 x 1	HDMI 2.0 x 1 Input HDMI 1.4 x 1 Input HDMI 2.0 x 1 Output USB 3.0 x 1 USB 2.0 x 1 Type C x 1 RJ45 x 1 Audio Out 3.5mm x 1 RS232(RJ45 interface) x 1
Interior	HDMI 2.0 x 1 Input HDMI 1.4 x 1 Input USB 3.0 x 1 RJ45 x 1 Audio Out 3.5mm x 1 RS232(RJ45 interface) x 1	<input type="checkbox"/>

Features

Auto Video Scaling	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Wireless Content Sharing (Hotpot OR LAN)		
Dongle	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MAXHUB Share	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Miracast	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Chromecast	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Airplay	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Multi-device Sharing Screen ^①	Max 4 devices	Max 4 devices
Dongle for Wireless BYOD	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Muti-window Split Screen	<input checked="" type="checkbox"/> 5-split screen	<input checked="" type="checkbox"/> 3-split screen
MAXHUB Pivot	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
API Command Control ^②	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Deployment

Dimension of Display	135" (3012 x 1700mm) 162" (3612 x 2037mm)	135" (3012 x 1709mm)
Weight of Display	135"-100kg 162"-144kg	135"-105kg
Max Power Consumption	135"-1.87 KW 162" -2.69KW	135"-1.25KW
Istallation Thickness of Wall-mounted	62mm	62mm
Maintenance	Front Access	Front Access

① Exclusive for sharing screen via MAXHUB Share client or the MAXHUB dongle

② API command reference document: MAXHUB LED Raptor Series V3 API Commands V2.0