


# PULSE



Give all your meters communications capability.

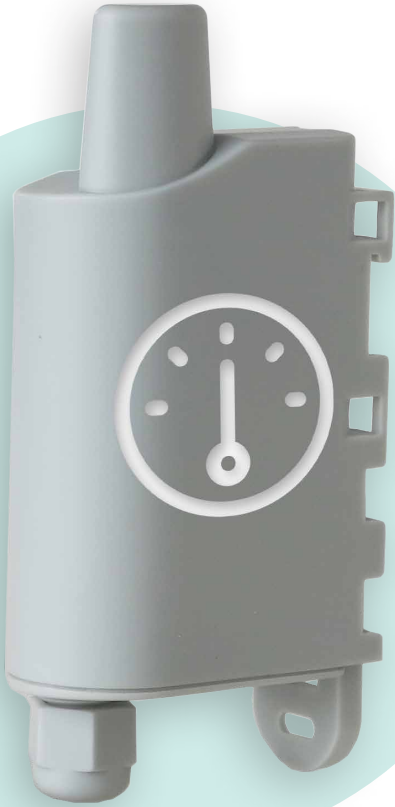


**ALERT**

- Monitor any leaks



**MONITOR**

- Receive readings feedback from gas and power meters
- Monitor over-consumption (gas, water and electricity)



## FUNCTION

Pulse-based interface

## BENEFITS

- Up to 2 connectable meters
- Detection of tampers and leaks
- Flow rate monitoring
- Locally and remotely configurable
- Low power consumption for optimal autonomy



## PRODUCT USES



Monitor your energy consumption on a building (water, electricity...).



Count the number of people or the traffic in a specific place.

## TECHNICAL SPECIFICATIONS

- Periodic modes with log
  - Soldered battery
- Dimensions: 105 x 50 x 27 mm
  - Box: IP67 (IP68 on request)
- Integrated fastening system: DIN rail, tube, wall, flange
  - Configurable Life Screen
- Zone: Sigfox: RC1 / LoRaWAN: EU863-870 / WM-Bus: 868
- Operating temperature range: -25°C / +70°C
  - Weight: 70 g
  - Standards: Directive 2014/53/EU (RED)
- Alert concerning product, configuration error, low battery